

JL-240X/TX

Fixed Twist-lock dimming receptacle (NEMA 7P/5P)

JL-240XA



JL-240TXA



JL-240XB



JL-240TXB




Product Summary


All the JL-240 series photocontrol receptacles were designed for the lanterns those intended to have an ANSI C136.10 receptacle to fit a twist-lock photocontrol. This series conform newly published ANSI C136.41 to allow a LED lamp multi-controlled through the receptacle.

This series offers 2 or 4 gold-plated low voltage pads on the top surface to fit photocontrol has ANSI C136.41 conforming spring contacts, and offers 2 or 4 wiring leads at rear side for signal connection.

This series also offers 360° rotation limiting feature to conform ANSI C136.10 requirements, in case rotatable.

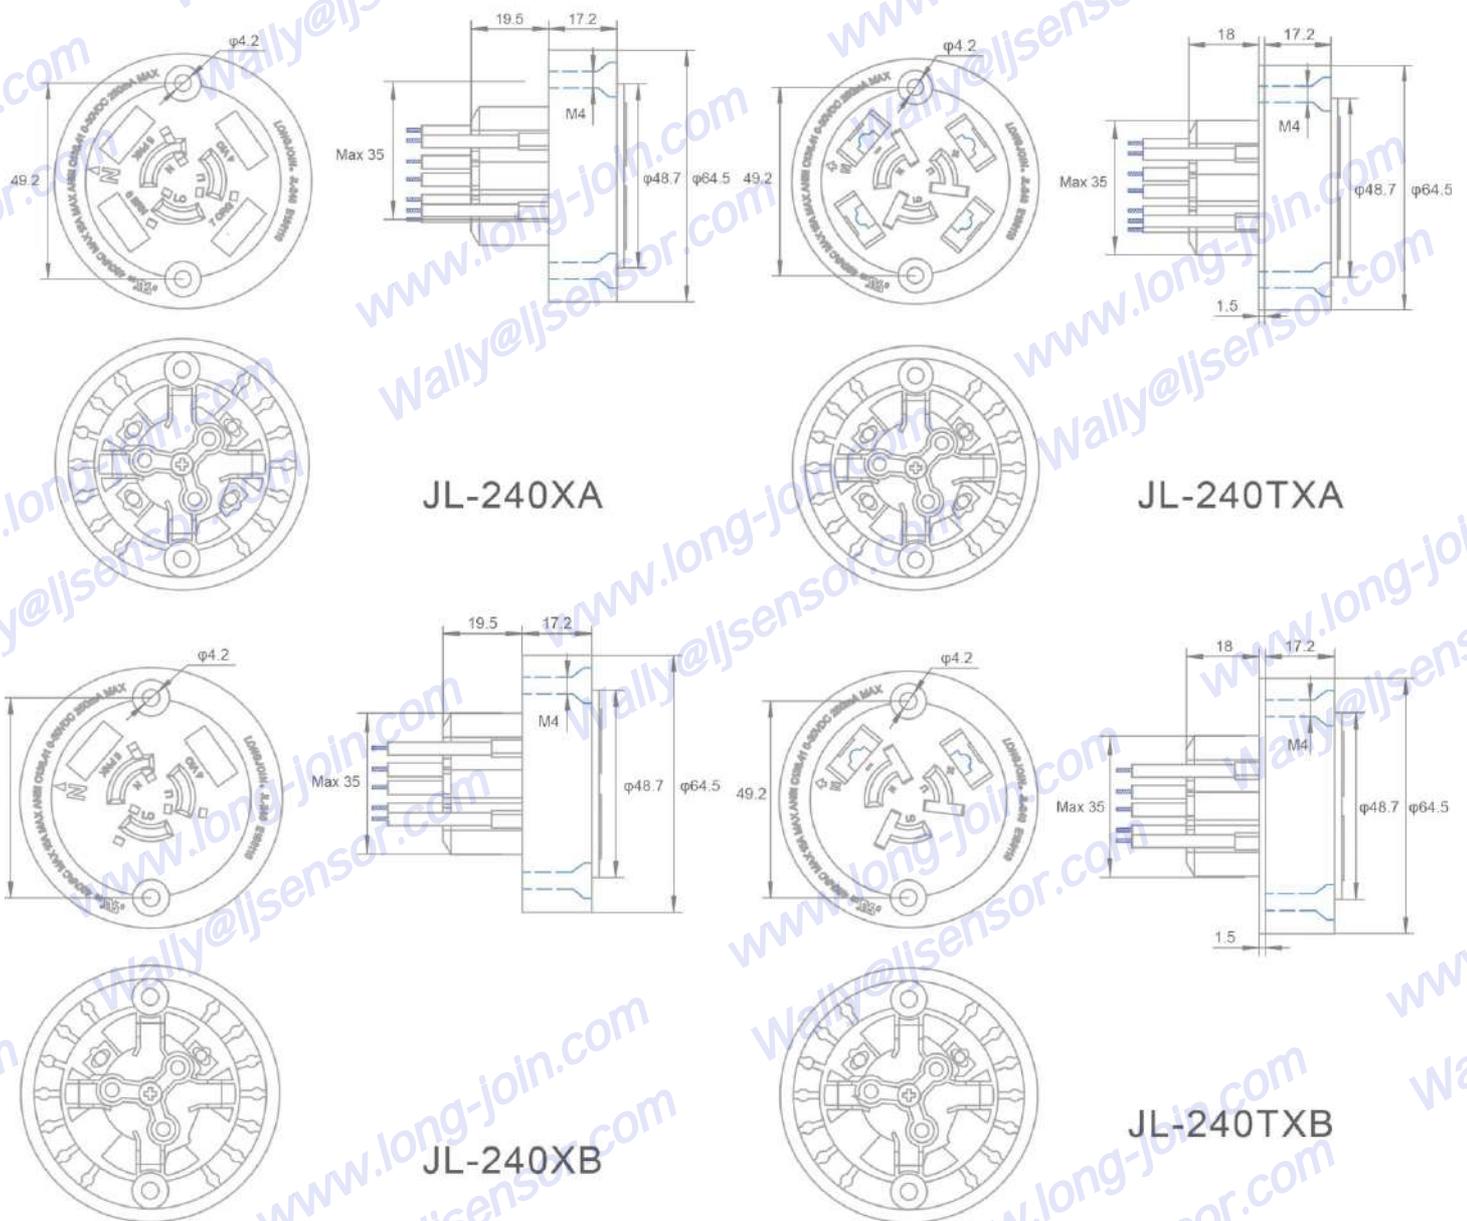

Washer Size

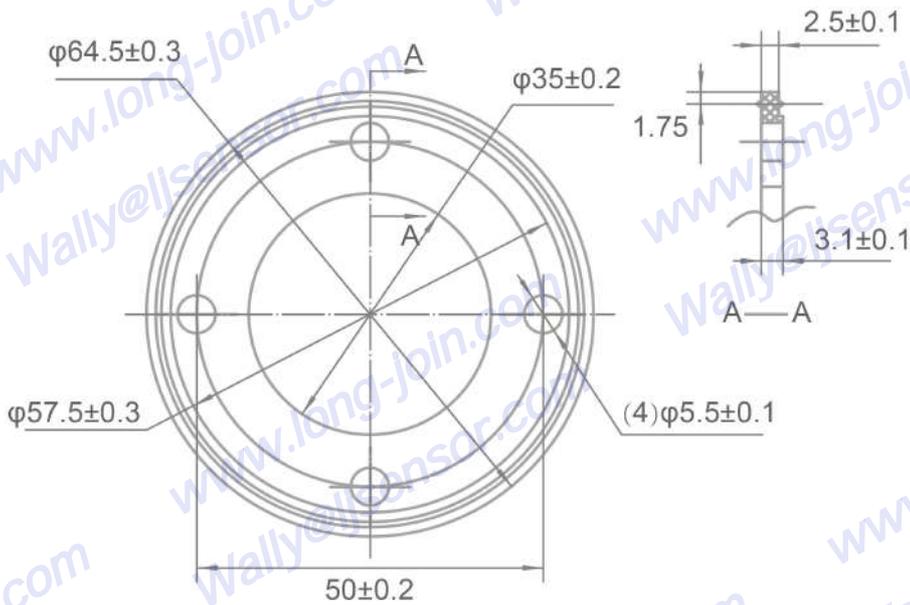

Features

- Glass-Fiber strongen PBT
- Gilded Pads made from phophor bronze Nickel plated and gilded over 0.7um
- Gold plating per ASTM B 488
- Silicone gasket offered
- TPE gasket gathered to flange for easier assembling


Specifications

Model No.	JL-240X/TX
Applicable Volt Range	0~480VAC
Rated Frequency	50/60Hz
Load Rating	15A
Signal Control	0-30 VDC, 250 mA Max
Lead	16AWG,14AWG 6" min
Ambient Temperature	-40°C ~ +70°C
Related Humidity	96%
Outdoor Wiring Cable	●



Installation

Disconnect power; wire the receptacle according to the diagram below.

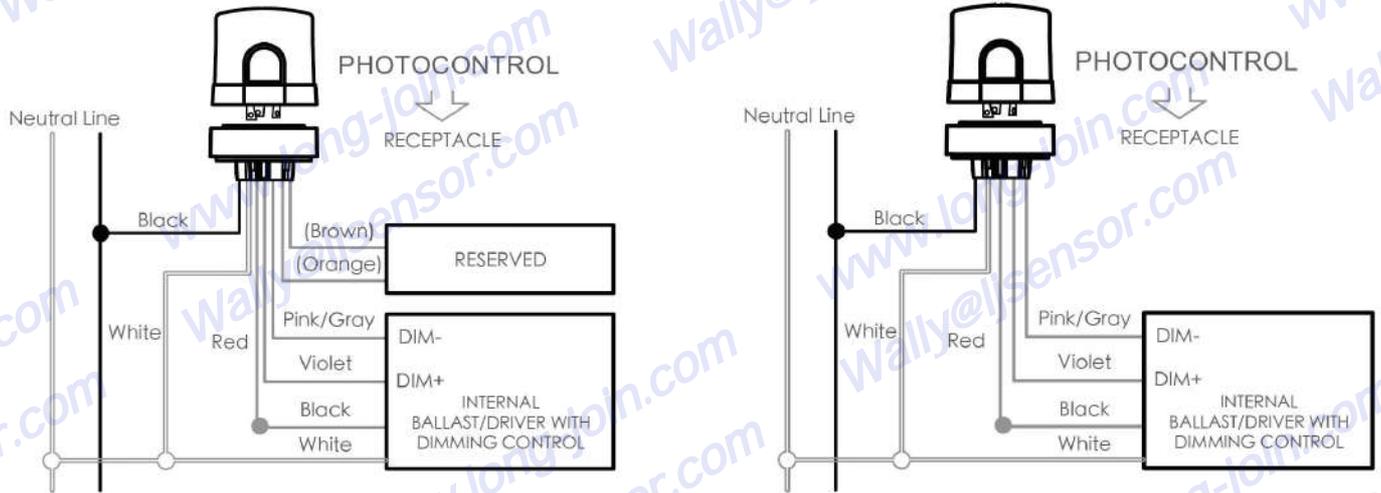

An arrow indicating NORTH on the top face is used to assist correct orientation.

Ordering Information

JL-240X A 14 12 R -7P N1 S C

	1	2	3	4	5	6	7	8	9
JL-240	X	A	14	12	R	7P	N1	S	C

1: Model Number

X = gasket separated version

TX = gasket integrated version

2: A= 4 Dimming pads

B=2 Dimming pads

3: Power Lead Rating

14= 14 AWG, 105°C rated

14G= 14 AWG 150 °C rated

16= 16 AWG, 105°C rated

16G= 16 AWG 150 °C rated

16S= 16 AWG Double isolated wire (Class II)

4: 12= 12" (Customizable, 06 Min.)

5: R=back cover

6: 7P=7 wires

5P=5 wires

7: N1=gasket (for JL-240X only)

8: S= wire outlets glued

9: C= Outdoor wiring cable

null= Appliance wiring wire

Follow us : Ctrl + click icon





SHANG HAI LONG-JOIN INTELLIGENT TECHNOLOGY CO.,LTD.



Contact Now !

24/7 availability
+86 159 0082 9072
Customer Service
Sample Service
Technical Service

